## OTA Performance Measurement Report

Report Ref. No.

T180810N06

**Applicant:** 

Smartmissimo Technologies Pte Ltd

Date of Application: 2018/8/27

**Test Period**: 2018/8/27 **Date of Issue**: 2018/8/27

**Test Lab Info:** 

Compliance Certification Services Inc. No.11, Wugong 6<sup>th</sup> Rd., Wugu Industrial Park. Taipei Hsien 248, Taiwan, R.O.C. **Test Item** 

Name of Product:

PowerDot PD-02

**Brand Name:** 

PowerDot

Model/ Ref. No:

Muscle Stimulator

Remarks:

2402 MHz · 2441MHz · 2480MHz 3D Gain Measurement Results

Confirmation

Approved by

Tested by

Weiking Lin

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Page 1 Total Page: 9

Rev. 00



# **Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2018/08/27	Initial Issue	ALL	Alex.Wu

Page 2 Rev. 00

### **Table Of Contents**

1	GENERAL INFORMATION		4	
	1.1	DESCRIPTION OF DEVICE UNDER TEST (DUT)	4	
	1.2	PRODUCT PHOTO	4	
2 SUMMARY OF TEST RESULT		5		
	2.1	AMBIENT CONDITION	. 5	
3	DESC	CRIPTION FOR DUT TESTING POSITION	6	
4	3 <b>D</b> T	EST PLOTTING	7	

### 1 General Information

### 1.1 Description of Device Under Test (DUT)

Product Feature & Specification						
Brand Name	PowerDot					
Model Name	Muscle Stimulator					
Frequency	2402MHz · 2441MHz · 2480 MHz					

#### 1.2 Product Photo



Page 4 Rev. 00

## 2 Summary of Test Result

### 2.1 Ambient Condition

Temperature(° c)	23.6	Humidity(° c)	58%	
Test/Position	Gain/Free Space			
Frequency	2402	2441	2480	
Ant. Port Input Pwr. (dBm)	0	0	0	
Tot. Rad. Pwr. (dBm)	-6.54871	-5.33911	-6.50475	
Peak EIRP (dBm)	-2.83206	-0.760841	-2.60439	
Directivity (dBi)	3.71665	4.57827	3.90036	
Efficiency (dB)	-6.54871	-5.33911	-6.50475	
Efficiency (%)	22.1375	29.2475	22.3627	
Gain (dBi)	-2.83206	-0.760841	-2.60439	
NHPRP ±Pi/4 (dBm)	-7.80119	-6.64577	-8.0487	
NHPRP ±Pi/6 (dBm)	-9.1769	-8.02275	-9.54641	
Average Gain (dB)	-6.54871	-5.33911	-6.50475	

Page 5 Rev. 00

## 3 Description for DUT Testing Position




Page 6 Rev. 00

#### **Test Plotting** 4

Azimuth = 0.0 Elevation = 0.0


RoII = 0.0

The test plotting was shown as below

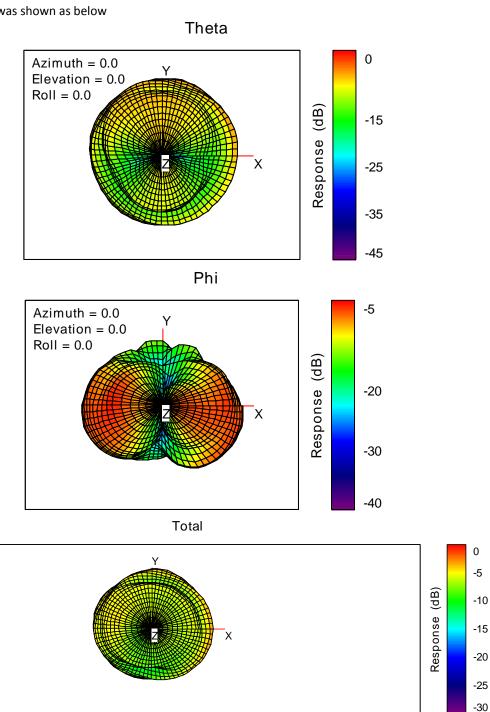


Antenna Gain 2402 MHz

Rev. 00 Page 7

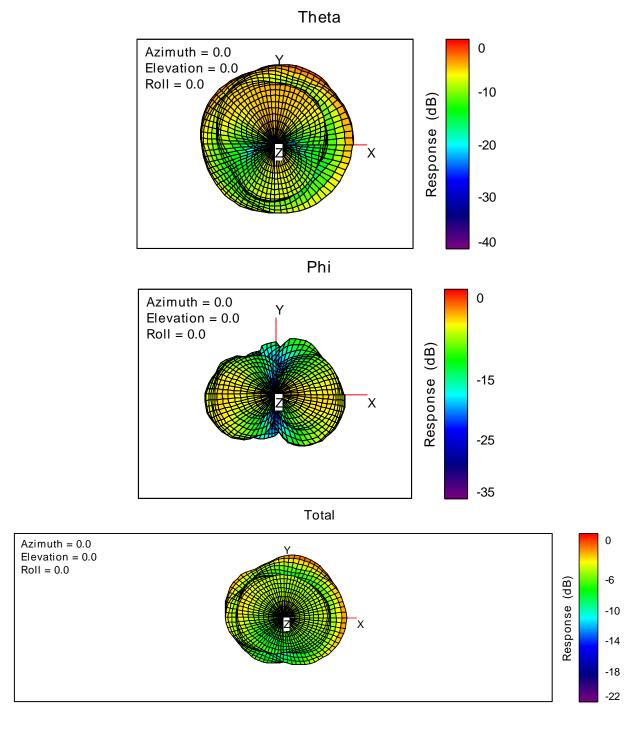

Antenna Gain 2441 MHz

Page 8 Rev. 00

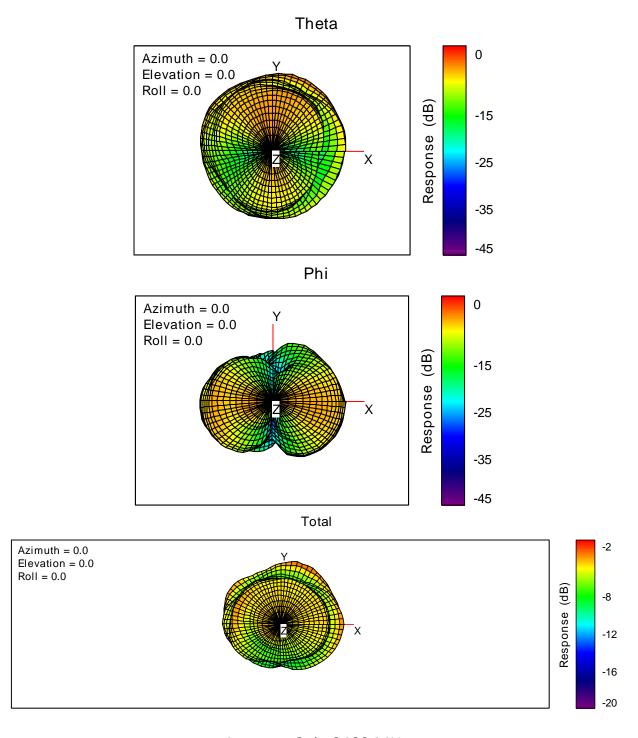

Antenna Gain 2480 MHz

Page 9 Rev. 00